

PIONEER MIDWEST INC.


Winterization instructions for Self-Drain Systems

www.pioneermidwest.com

763-420-8981

**415 County Rd 81
Osseo, MN 55369**

1. Inside: Turn water off in basement.
2. Outside: Open test ports valves on side of PVB and leave open until spring.
3. Outside: Pull out plug and leave out until spring.
4. Outside: Turn two brass valves to the Half-open position and leave until spring.
5. Inside: Place pale under drain valve, open drain and leave open until spring. Inside: Turn controller to the OFF position. If you unplug it, remove the 9volt battery if you controller has one. Note: If you unplug your controller, you will lose your program.

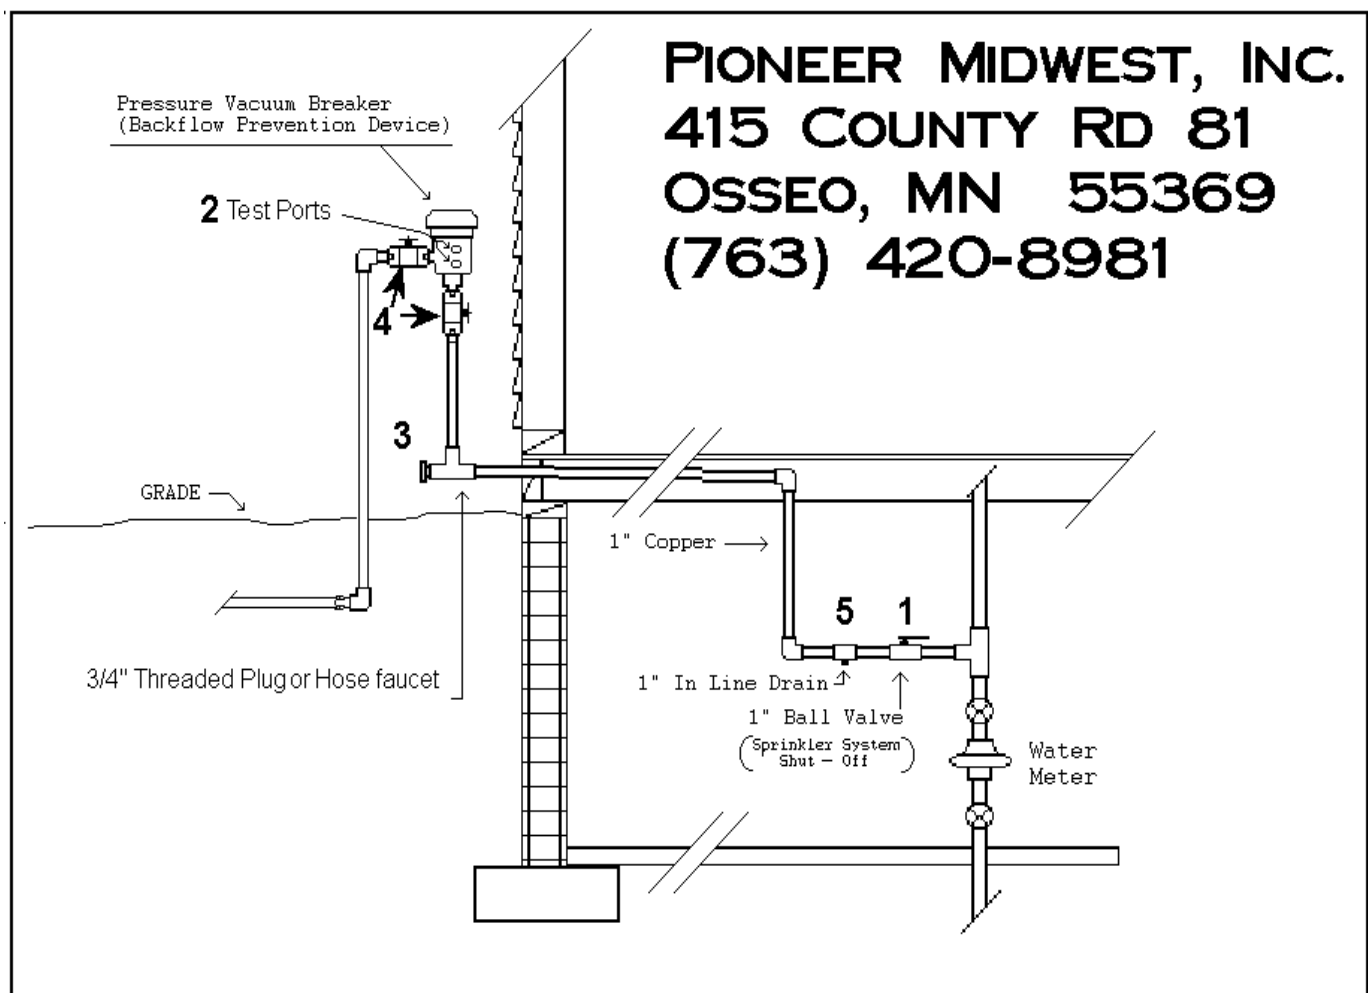

Additional requirements for Fertile Earth system

6. Outside: You will need a Philips screwdriver, two Ziploc plastic bag and Needle nose pliers.



7. In the box that has you Fertile Earth, open the box, and remove the gallon of fertilizer. You should store the Fertilizer indoors.
8. Remove the Philips Screw, Lift Cover off top of unit,

9. Remove the snap ring (yellow or white), then using the needle nose pliers to remove the gear assembly. Gently put up on the gear assembly
10. Be sure to remove the large O-Ring. Put all of the parts in a plastic bag.
11. Put a Plastic bag over the top of the unit to insure that no dirt or rodents get in to the system. Then re cover box.

